VORTEX-GENIE 2®

OPERATING INSTRUCTIONS

Models SI-0240, SI-0250 and SI-0251

Vial Attachment 0A-0570-010

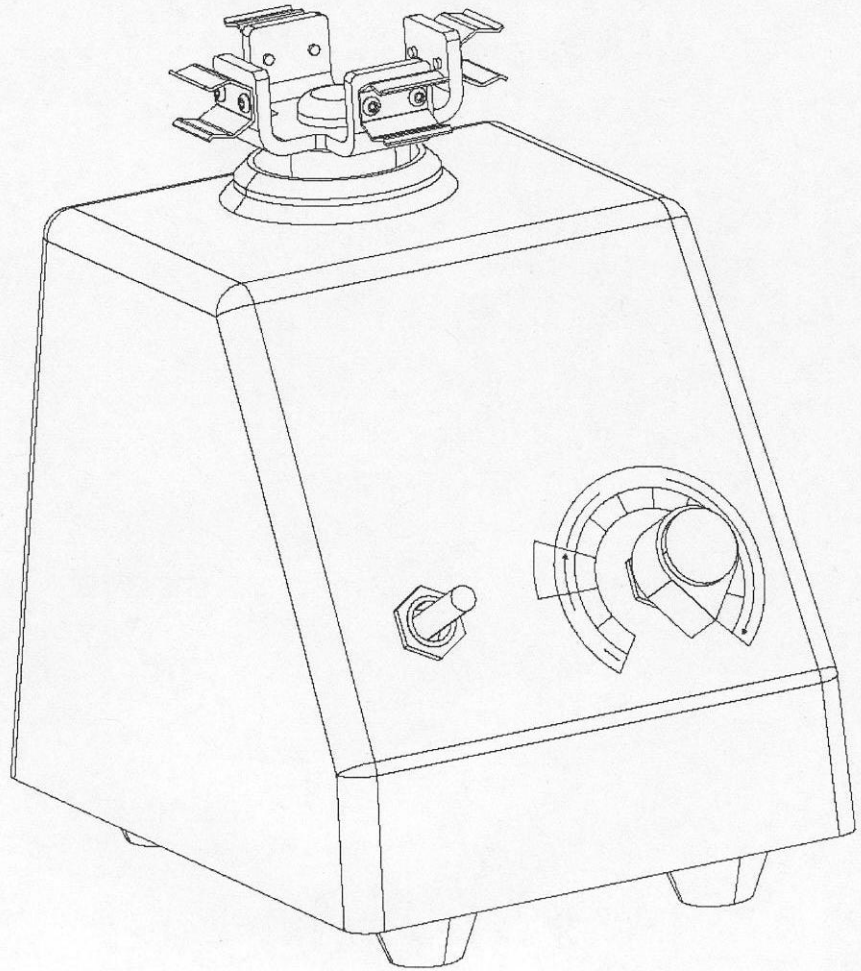

Scientific Industries, Inc.™

70 Orville Drive, Bohemia, NY 11716
Tel: (631) 567-4700 Fax: (631) 567-5896
Customer Service: custsvc@scientificindustries.com
Other Information: info@scientificindustries.com
www.scientificindustries.com

© Scientific Industries Inc. 2004

LTP0014 Rev. A

OPERATING INSTRUCTIONS

1. Plug the cord into a properly grounded, three-pronged outlet. (120V for the SI-0240 model; 240V for the SI-0250 and SI-0251).

2. Install the Vial Attachment Assembly (14) on the head of the mixer (1). Look inside the cup on the attachment and note the position of the key. Line the key up with the flat on the head and push on firmly until it snaps in place.

3. Push the vials into the spring clips on the Vial Attachment Assembly. Set the speed as indicated in the directions for mixing the vials and follow all procedures carefully. Push the switch to "ON" (l) to start the mixer.

NOTE: Do not operate the mixer with the vials attached for more than 1 ½ hours at speeds above 4. Allow the mixer to cool for ½ hour before resuming mixing.

4. When finished, return the switch to "OFF" (0) position in the center.

! **CAUTION! Do not lift your VORTEX-GENIE 2 by the Vial Attachment Assembly.**

! **CAUTION! Failure to follow operating instructions can compromise user's safety.**

Care and Handling

Your VORTEX-GENIE 2 MIXER should be given the care normally required for any electrical appliance. Avoid wetting or unnecessary exposure to fumes. The finish can be washed with water and soap or detergents, using a cloth or sponge.

! **CAUTION! Unplug from power before cleaning. Do not immerse.**

SPECIFICIATIONS

The VORTEX-GENIE 2 MIXER is classified as "Installation Category 2" Environmental: 32 F (0 C) – 100 F (38 C), 95% Humidity max.

MODEL	POWER REQUIRED	AMPS
SI-0240	120V/60Hz	.65
SI-0250	240V/50Hz	.5
SI-0251	240V/50Hz	.5

VORTEX-GENIE 2®

Part Assembly List

To order parts for the VORTEX-GENIE 2®
Call, fax or write your local distributor. Please specify part #, quantity and electric voltage.

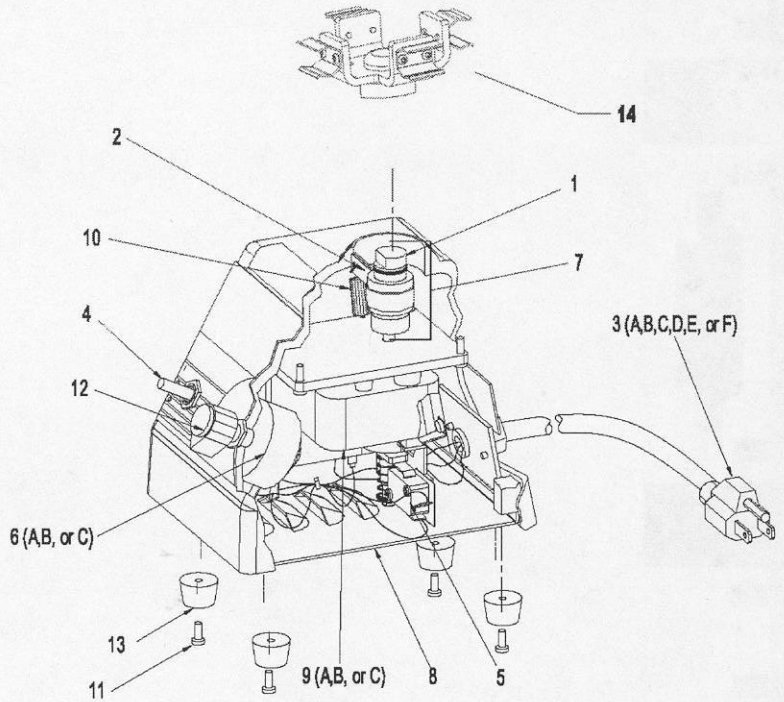

Indicator #	Part #	Description	Indicator #	Part #	Description
1	OK-0236-902	Bearing Retainer Kit	7	OK-0236-904	Eccentric With Clamp Ass'y
2	OK-0236-903	Eccentric Clamp	8	OM-0236-208	Bottom Closure
3A	318-0510-00	120V Line Cord	9A	OK-0236-905	Motor 120V Ass'y
3B	OK-0246-901	240V Line Cord, without Plug	9B	OK-0246-915	Motor 240V Ass'y
3C	OK-0256-901	240V Line Cord, European Plug			
4	ESP0004	Switch, On/Off/On	10	566-0028-00	Spring, Extension, Eccentric
5	ESP0005	Micro Switch	11	SCP0030	Screws, Bottom Closure (4)
6A	EPP0005	Speed Control 120V	12	OM-0236-209	Knob, Push On
6B	EB-0246-500	Speed Control 240V	13	OK-0236-907	4 Feet with Screws
			14	OA-0570-010	15-17mm Dia. Vial Attach. As.

Operating & Installation Guides

For the Vortex-Genie 2®

Operating and Installation instructions:

1. Plug the cord into a properly grounded, three-pronged outlet. (120V for the G560 model; 240V for the G560E; 100V for the G560-100V)

2. Your VORTEX-Genie® 2 is supplied with the 3" head installed and is ready for use for most one-handed applications. To install the cup head or other head attachments follow these steps:

   a. Turn power to "OFF" (O) position
   b. Remove the installed head by pulling straight up
   c. Place alternate head on post and rotate until "flats" align
   d. Press head down firmly until it snaps into place

3. For intermittent operation, push switch to "TOUCH" position. For continuous operation, push switch to "ON" position.

4. In either case, turn speed control to #3 in the shake range. (Mixer may not start if dial is lower than #3). In the "ON" position, you will see the head in motion immediately. In the "TOUCH" position, the vessel you are using must come in contact with the head to achieve motion. To get the desired mix, vary the speed of the motor and/or the angle.

5. When finished with either continuous or intermittent operation, return switch to "OFF" position in the center.

6. Your VORTEX-Genie® 2 mixer can become warm to the touch with constant use. There is nothing wrong with it. The stronger motor (UL listed) simply puts out more heat.

Caution! Do not lift your Vortex-Genie 2® mixer by its head.
All its heads, including the cup, are removable. They will pop off easily if you lift them, and snap on again just as easily by aligning and then pressing down.

Caution! Failure to follow operating instructions can compromise user's safety.

Care and Handling
Your VORTEX-Genie® 2 mixer should be given the care normally required for any electrical appliance. Avoid wetting or unnecessary exposure to fumes. The finish can be washed with water and soap or detergents, using a cloth of sponge.

Caution! Unplug from power before cleaning. Do not immerse.